



**1 x 3/8 in. 90/10 Copper Nickel Coupling.  
 400 lb Rating, Socket weld Connection,  
 Reducing 803-6397430**

---

<u>Item No.</u>	M120122	<u>UOM</u>	EA
-----------------	---------	------------	----

[View Product Online to Request Quote](#)

**Specifications**

Type	Coupling
Item Remarks	Reducing
Size	1 x 3/8 in.
Material	Copper Nickel
Material Grade	90/10 Copper Nickel
Pressure Class	400 lb
Connection	Socket weld
Specification	
NAVSEA Dwg.	803-6397430
Market	Navy

Product URL: <https://torksystems.com/M120122>

# COUPLING

## SOCKET WELD

**SPECIFICATION: NAVSEA DWG 803-6397430**  
**PRESSURE RATING: 400 PSIG (WOG)**


INTENDED FOR USE WITH CLASS 200 OR 700  
 COPPER NICKEL TUBE IAW MIL-T-16420

SERVICE RATING TABLE

Nominal Pipe Size (INCHES)	Maximum Working Pressure (LB/IN <sup>2</sup> )	Maximum Temperature (F°)	Maximum Working Pressure (LB/IN <sup>2</sup> )	Maximum Temperature (F°)
1/4 through 6	200	425	400	150
Above 6	150	425	250	150



70/30 CUNI  
 (ALLOY C715/C964)

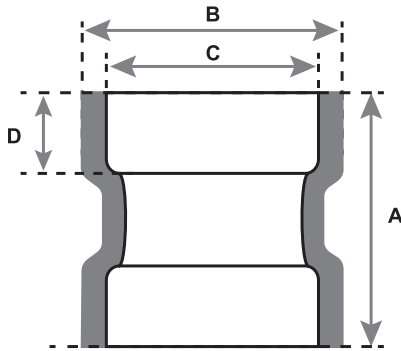

90/10 CUNI  
 (ALLOY C706/C962)

AVAILABLE ALLOYS: CUNI 90/10 & CUNI 70/30

NOMINAL PIPE SIZE	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	3 1/2	4
A	.97 +/- .08	1.05 +/- .100	1.29 +/- .120	1.43 +/- .120	1.68 +/- .140	1.86 +/- .140	1.92 +/- .160	2.2 +/- .160	2.88 +/- .200	3.18 +/- .200	3.43 +/- .200	3.69 +/- .240
B	0.945	1.096	1.275	1.503	1.780	2.129	2.387	2.908	3.408	4.041	4.541	5.097
C	.545 (+/- .030)	.680 (+/- .030)	.845 (+/- .030)	1.055 (+/- .030)	1.320 (+/- .030)	1.665 (+/- .030)	1.905 (+/- .030)	2.380 (+/- .046)	2.880 (+/- .051)	3.505 (+/- .055)	4.005 (+/- .055)	4.505 (+/- .060)
D	25/94	5/16	3/8	13/32	7/16	1/2	5/8	23/35	25/32	77/93	7/8	29/32

NOTES: Fittings may be ordered with reduced ends and/or female threads  
 All sizes are in inches.