



2-1/2 in. Bronze Swing Check Valve. Class 150 Rating, Flanged Connection, Monel Trim. OKV

<u>Item No.</u>	M101856	<u>UOM</u>	EA
<u>Brand</u>	OKV		

[View Product Online to Request Quote](#)



Specifications

Type	Swing Check Valve
Size	2-1/2 in.
Material	Bronze, Brass, Al-Brz
Material Grade	Bronze
Trim	Monel
Pressure Class	Class 150
Connection	Flanged
Specification	ANSI B16.5
Market	Commercial

Product URL: <https://torksystems.com/M101856>

Hydro' Test Pressure

	bar	psi
BODY	24.2	350
SEAT	15.5	225

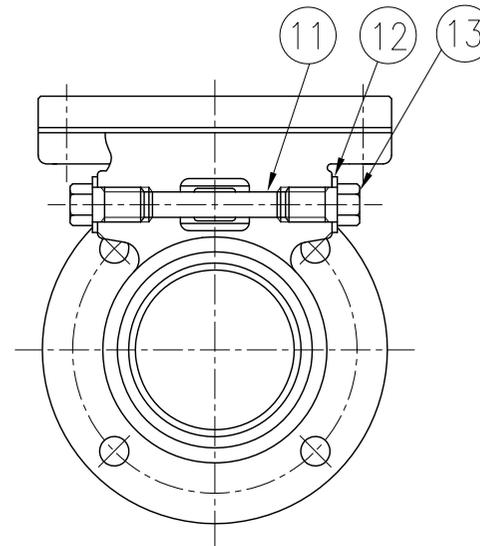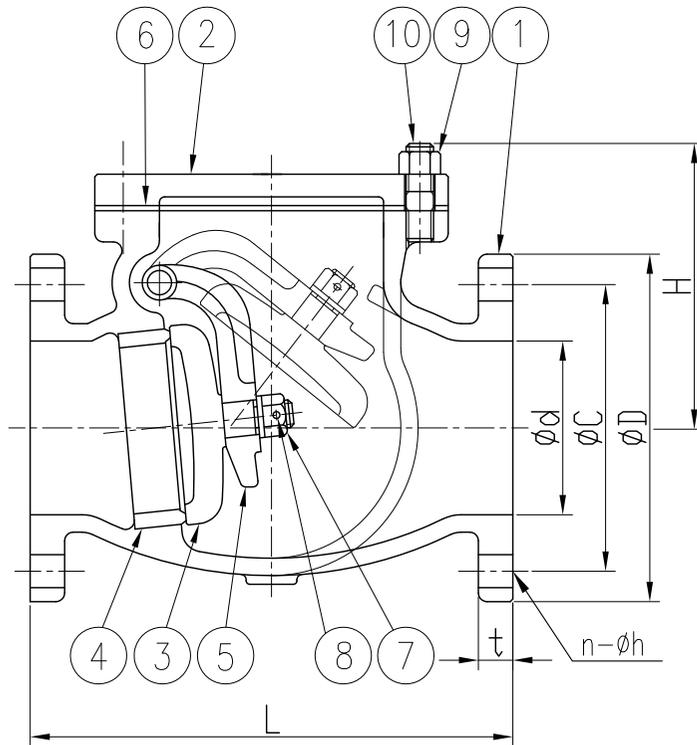

NOTE

- * Applicable Standard
- 1. Valve Standard & Code : ASME B16.34
- 2. Face to Face : ASME B16.10
- 3. Flange Dimension : ASME B16.24
- 4. Inspection & Test : API 598

13	Side plug	Brass
12	Plug gasket	PTFE
11	Hinge pin	Brass
10	Stud bolt	
9	Nut	
8	Cotter pin	Brass
7	Disc nut	Brass
6	Gasket	NON-ASBESTOS
5	Arm	B62
4	Seat ring	MONEL 400
3	Disc	MONEL 400
2	Bonnet	B62
1	Body	
NO.	COMPONENT	MATERIAL

△		
△		
△	First Issued	-
No.	ALTERNATION	SEAL

TITLE CAST BRONZE, SWING CHECK VALVE
ASME 150Lbs - 2" TO 5"

DRAWN.	CHEC.	APPRO.	DATE	2013.04.23	SCALE	N	S
S.H.LEE		S.H.AHN	TYPE	Bolted cover			
			DWG. NO.	SCVB-BC-150P-2B			

OKV OK KWANG Engineering Co., Ltd

DIMENSION [Unit: mm]

SIZE	ød	FLANGE ASME 150Lbs				L	H	Remark
		øD	øC	n-øh	t			
2"	51	150.0	120.7	4-19	12.7	203	121	
2 ½"	64	178.0	139.7	4-19	14.2	216	113	
3"	76	190.0	152.4	4-19	15.7	241	140	
4"	102	230.0	190.5	8-19	17.5	292	150	
5"	127	255.0	215.9	8-22	19.1	330	189	