



2 in. Bronze Lift Check Valve. Class 150 Rating, Flanged Connection, Bronze Trim. OKV



<u>Item No.</u>	M101906	<u>UOM</u>	EA
<u>Brand</u>	OKV		

[View Product Online to Request Quote](#)

Specifications

Type	Lift Check Valve
Size	2 in.
Material	Bronze, Brass, Al-Brz
Material Grade	Bronze
Trim	Bronze
Pressure Class	Class 150
Connection	Flanged
Specification	ANSI B16.24
Market	Commercial

Product URL: <https://torksystems.com/M101906>

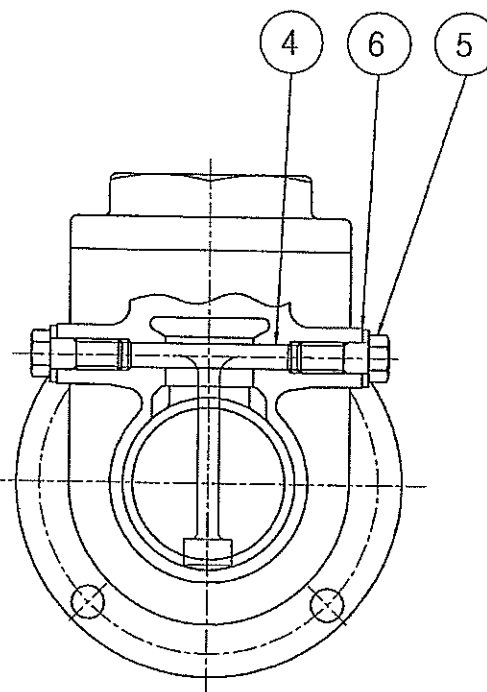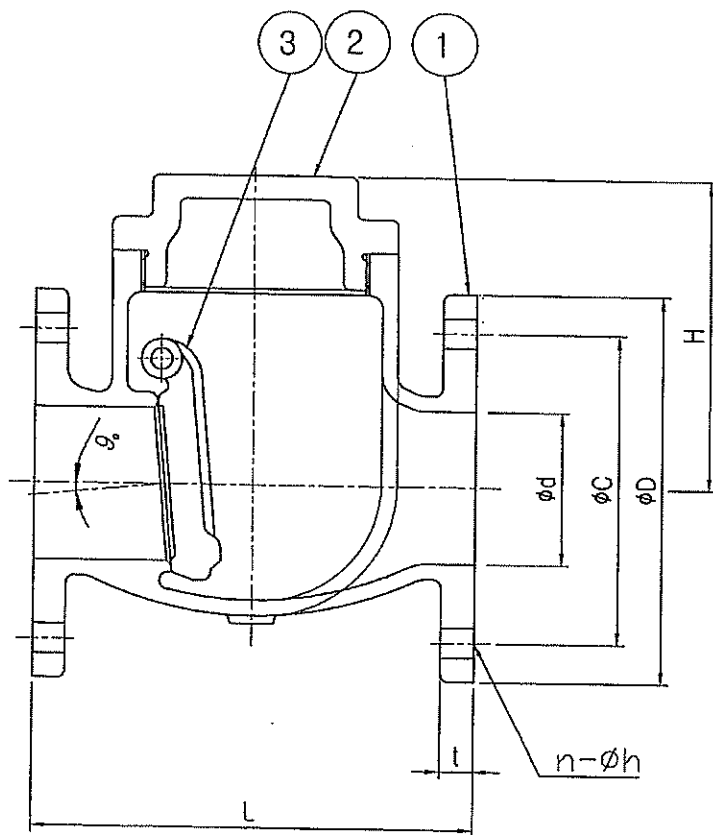

Hydro' Test Pressure

	Kgf/cm ²	psi
BODY	24.6	350
SEAT	15.8	225

NOTE

- * Applicable Standard
- 1. Face to Face : Maker Standard
- 2. Flange Dimension : ASME B16.24
- 3. Inspection & Test : API 598

6	Gasket	Non-Asbestos
5	Plug	B124-C37700
4	Hinge Arm	
3	Disc	B62-C83600
2	Cover	
1	Body	
NO.	COMPONENT	MATERIAL

△		
△		
△	First Issued	
No.	ALTERNATION	S

TITLE BRONZE, SWING CHECK VALVE
ASME 150lbs

DRAWN.	CHEC.	APPRO.	DATE	2011.03.30	SCALE
JHKANG	X	4	TYPE	Screw Bonnet	
			DWG. NO.	SWV-BC-150P-0.5-3B	

OKVOK KWANG Engineering Co., I

DIMENSION

[Unit: mm]

UNIT: MM

SIZE	Ød	FLANGE ASME 150lbs FF				L	H	Remark
		ØD	ØC	n-Øh	t			
1/2"	12.7	90	60.5	4-15.7	7.9	111.1	51	
3/4"	19.1	100	69.9	4-15.7	8.6	112.7	51	
1"	25.4	110	79.2	4-15.7	9.7	130.2	59	
1-1/4"	31.8	115	88.9	4-15.7	10.4	141.3	67	
1-1/2"	38.1	125	98.6	4-15.7	11.2	165.1	76	
2"	50.8	150	120.7	4-19.1	12.7	177.8	97	