2-1/2 in. Bronze Hose Globe Valve. Class 150 Rating, Flanged Connection, Bronze Trim. OKV

Item No.	M102032	UOM	EA
Brand	OKV		

View Product Online to Request Quote

Specifications

Type	Hose Globe Valve
Size	2-1/2 in.
Material	Bronze, Brass, Al-Brz
Material Grade	Bronze
Trim	Bronze
Pressure Class	Class 150
Connection	Flanged
Specification	ANSI B16.24
Market	Commercial

Product URL: https://torksystems.com/M102032

Hydro' Test Pressure

	Kgf/cm²	psi
BODY	24.6	350
SEAT	15.8	225

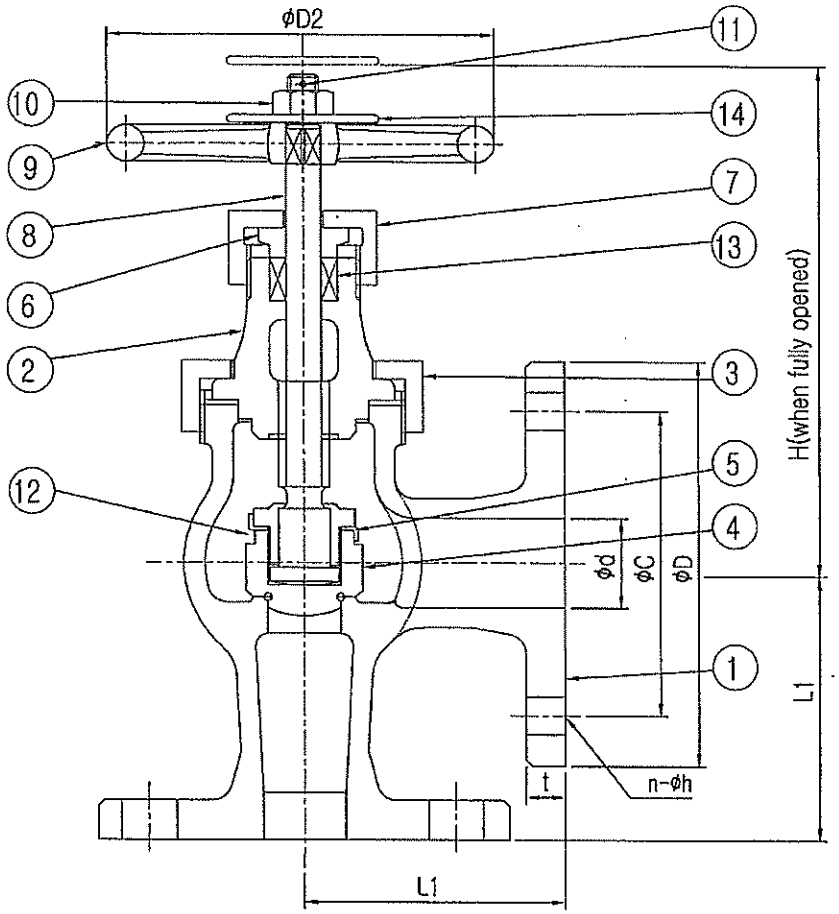

NOTE

* Applicable Standard
1. Face to Face : Maker Standard
2. Flange Dimension : ASME B16.24
3. Inspection & Test : API 598

NO.	COMPONENT	MATERIAL
14	Name Plate	Brass
13	Packing	PTFE
12	Lock Washer	Brass
11	Split Pin	
10	Handwheel Nut	B16-C36000
9	Handwheel	A126-CL.B
8	Stem	B124-C37700
7	Gland Nut	B62-C83600
6	Packing Gland	B124-C37700
5	Disc Nut	
4	Disc	B62-C83600
3	Union Nut	
2	Bonnet	
1	Body	

No.	ALTERNATION
⚠	
⚠	
⚠	First Issued

TITLE	BRONZE, ANGLE VALVE ASME 150Lbs				
DRAWN.	CHEC.	APPRD.	DATE	2011.03.31	SCALE
J.H.KANG			TYPE	Union bonnet	
			DWG. NO.	ANV-BC-150P-0.5~3B	

OKV OK KWANG Engineering Co.,

DIMENSION [Unit: mm]

SIZE	Φd	FLANGE ASME 150Lbs FF				L1	H	ΦD2	Remark
		ΦD	ΦC	n-Φh	t				
1/2"	12.7	90	60.5	4-15.7	7.9	55.2	120	80	
3/4"	19.1	100	69.9	4-15.7	8.6	60	130	80	
1"	25.4	110	79.2	4-15.7	9.7	66.7	145	100	
1-1/4"	31.8	115	88.9	4-15.7	10.4	73	150	125	
1-1/2"	38.1	125	98.6	4-15.7	11.2	81	165	125	
2"	50.8	150	120.7	4-19.1	12.7	95.3	180	140	
2-1/2"	63.5	180	139.7	4-19.1	14.2	109.5	200	160	
3"	76.2	190	152.4	4-19.1	15.7	117.5	220	180	